


Philips  
Audio recording cable

3.0 m

Composite A/V Connections

SWA2541W

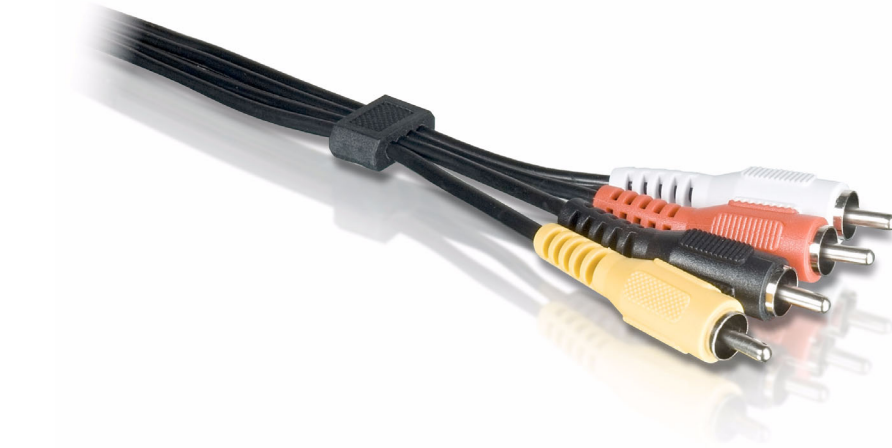

## Ensure a reliable connection

with this audio recording cable

Depend on this cable to connect a recordable device to your receiver to play and record music.

### Enjoy good audio quality

- Nickel-plated connectors for reliable contact
- High purity copper conductor for reliable signal transfer

### Protects against signal loss

- Bare copper shielding

### Easy installation

- Color coded connectors for instant recognition
- Non-slip ergonomic grip for easy use

### Enjoy extended durability

- Molded plug for secure connections
- Flexible PVC jacket

# PHILIPS

sense and simplicity

Audio recording cable  
3.0 m Composite A/V Connections

## Specifications

### Packaging dimensions

- **Packaging dimensions (W x H x D):**  
9.5 x 23.5 x 3.5 cm
- **Nett weight:** .21 kg
- **Gross weight:** .23 kg
- **Tare weight:** .02 kg

### Outer Carton

- **Outer carton (L x W x H):** 33.9 x 26.3 x 34.2 cm

- **Nett weight:** 5.04 kg
- **Gross weight:** 6.54 kg
- **Tare weight:** 1.5 kg

### Inner Carton

- **Inner carton (L x W x H):** 24.4 x 10.4 x 15.8 cm
- **Nett weight:** .84 kg
- **Gross weight:** 1 kg
- **Tare weight:** .16 kg

SWA2541W/10

## Product highlights

### Color-coded connectors

*Color coded connections make it easy to install your cable into the correct inputs and outputs*

### Molded plug

*Molded plugs ensure secure connections between components and offer extended durability.*

### Flexible PVC Jacket

*Flexible PVC jacket provided protection to the delicate core of the cable. It also offers extended durability and ease of installation.*

### Bare copper shielding

*Bare copper shielding protects against signal loss.*

### Easy grip

*This non-slip grip makes connecting your components easy and ergonomically comfortable.*

### Nickel-plated connectors

*Nickel-plated connectors establish a clean contact between the cable and connector for a reliable connection.*

### High purity copper

*This copper conductor provides high accuracy in signal transfer with minimal resistance.*



Issue date 2008-08-17

Version: 1.1.3

12 NC: 8670 000 35565  
EAN: 87 12581 38304 6

© 2008 Koninklijke Philips Electronics N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips  
Electronics N.V. or their respective owners.

[www.philips.com](http://www.philips.com)